

**SEMIMASCHERA FILTRANTE PIEGHEVOLE SENZA VALVOLA**  
**Articolo ST-A9522E**

I respiratori rispondono ai requisiti previsti dalla EN149:2001 + A1:2009 e sono marcati CE secondo quanto previsto dalla Direttiva Europea 93/42/EEc. L'ente certificatore National Quality Supervision and Testing Center for Personal Protective Equipmnet in Beijing CINA è responsabile della certificazione e del monitoraggio della produzione I prodotti sono realizzati in una fabbrica certificata ISO 13485:2016.

**MATERIALI**

*Materiale filtrante, conchiglia interna:* filtro in tessuto non tessuto soffiato a fusione

*Flangia nasale :* polietilene

*Elastico:* poliestere, gomma naturale

PESO : 5 g

**AREE DI IMPIEGO:**

Livello FFP2

TLV (FPN) 12X

POLVERI FINI TOSSICHE, FUMI, NEBBIE/AEROSOL A BASE ACQUOSA E OLEOSA

Contro polveri tossiche , per esempio ossido di alluminio, bauxite, borace, polvere di mattoni, cellulosa, cemento, polvere di carbone, gesso, calcare, intonaco, pollini, cemento Portland, saccarosio, zucchero, polvere di freni, ossido di calcio, porcellana, calcestruzzo, polvere di cotone, granito, fi eno, polvere e fumo di piombo, particolato da fumi di saldatura (non di metalli pesanti), silicio, idrossido di sodio, polvere di legno (legni teneri), fumo di ossido di zinco

(TLV = Valore Limite di Soglia - FPN = Fattore di Protezione Nominale)

**NR (Non Riutilizzabile) = Monouso. Confortevole e durevole per tutto il turno di lavoro**

**DPI di III Categoria**

**TEST SECONDO LA NORMA EN149:2001 + A1:2009**

*Perdita totale verso l'interno*

Dieci soggetti eseguono una serie di esercizi indossando il respiratore. Durante gli esercizi viene campionata la quantità di aerosol che penetra dal filtro del respiratore. La perdita totale verso l'interno relativa a 8 dei 10 soggetti non deve superare i seguenti livelli:

Classe FFP2 max. perdita tot. verso l'interno 8%

Secondo quanto previsto dalla EN149:2001 + A1:2009, la penetrazione del filtro dopo l'intasamento con 120 mg di olio di paraffina non deve superare i seguenti livelli:

Classe FFP2 max. perdita tot. verso l'interno 8%

#### *Infiammabilità*

4 respiratori vengono fatti passare attraverso una fiamma a 800°C (+/- 50°C) ad una velocità di 6 cm/sec. Dopo il passaggio attraverso la fiamma il respiratore deve auto-estinguersi.

#### *Resistenza respiratoria*

La resistenza respiratoria prodotta dal filtro del respiratore viene testata con un flusso d'aria di 30 l/min e 95 l/min.


Classe FFP2 max resistenza respiratoria

30l/min (0,7mbar)      95l/min (2.4mbar)

#### **ISTRUZIONI PER L'USO**

- L'utilizzatore deve essere addestrato e istruito riguardo l'indossamento del respiratore.
- I respiratori FFP non proteggono da gas e vapori
- La concentrazione di ossigeno nell'atmosfera deve essere almeno pari al 19,5% in volume.
- Questi respiratori non possono essere utilizzati se concentrazione, tipologia e proprietà dei contaminanti presenti nell'atmosfera sono sconosciuti o a livelli pericolosi.
- I respiratori devono essere gettati se danneggiati, se la resistenza alla respirazione diventa elevata in seguito all'intasamento o al termine del turno di lavoro.
- Il respiratore non deve mai essere manomesso, alterato o modificato

#### **ISTRUZIONI PER L'INDOSSAMENTO**




1. Tirare l'elastico fino a formare un ampio cerchio.



4. Regolare la tensione dell'elastico facendolo scorrere nei passanti.



2. Posizionare il respiratore sul mento e portare l'elastico inferiore dietro il collo.



5. Per togliere il respiratore sganciare la clip.



3. Tirare l'elastico superiore e posizionarlo dietro la testa.





6. Durante le pause lasciare il respiratore appeso al collo.

#### **INFO**

Per un aiuto nella selezione del prodotto idoneo e per il suo corretto utilizzo contattateci. Disponiamo di vario materiale di supporto

Test report e certificati CE forniti dal Produttore allegati

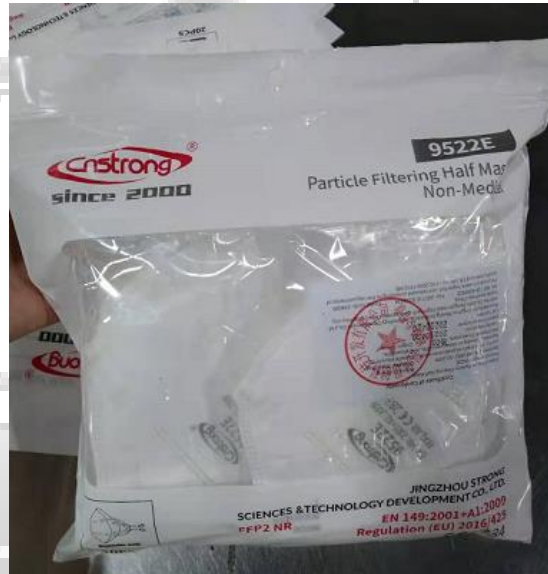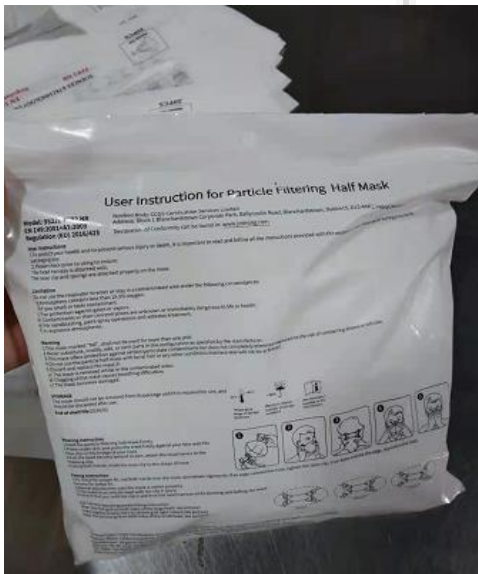

**EU Declaration of Conformity**

Annex IX PPE Regulation (EU) 2016/425



This EU Declaration of conformity refers to the following products:

Product name	Model	Classification	Batch No.
Particle filtering half mask	9522E	FFP2 NR	20210420

The Manufacturer's name and address is as follows:

Name	Jingzhou Strong Sciences & Technology Development Co., Ltd.
Address	No.32, East Jiangjin road, High-tech development zone, Jingzhou city, Hubei province, China

This Declaration of Conformity is issued under the sole responsibility of the Manufacturer.

Detailed description of the PPE to allow traceability/identification of the PPE.

White folding particle filtering half mask



The article identified in product category is in conformance with the relevant Union Harmonization Legislation Regulation (EU) 2016/425. References to the relevant harmonized standards used, including the date of the standard, or references to the other technical specifications, including the date of the specification, in relation to which conformity is declared: EN 149:2001+A1:2009.


CCQS Certification Services Limited. (NB 2834) performed the EU Type Examination (Module B) and issued the Type Examination Certificate as follows:

No.	EU Type Examination (Module B) Certificate Number
1	CE-PC-210115-026-01-9A

Product Category:

 This product is Category III and is subject to Module C2 internal production control plus supervised product checks at random intervals and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

 Signature:  Date: Apr 20<sup>th</sup>, 2021

 Company stamp: 





## Certificate of Module C2 production monitoring for equipment within the scope of Personal Protective Equipment Regulation (EU) 2016/425 Category III

FPC Certificate No.: CE-PC-200114-004-FPC-E

<b>Certificate holder:</b>	<b>Jingzhou Strong Sciences &amp; Technology Development Co., Ltd.</b> No.32, East Jiangjin Road, High-Tech Development Zone, Jingzhou City, Hubei Province, China
<b>Manufacturing location:</b>	No.32, East Jiangjin Road, High-Tech Development Zone, Jingzhou City, Hubei Province, China
<b>The scope of the certification for:</b>	<b>The manufacture of respiratory protective device</b> See annex for articles covered by this certificate
<b>Validity from:</b>	2020-04-09
<b>Revision date:</b>	2021-03-10
<b>To:</b>	2021-04-08

CCQS Certification Services Limited in its role as a Notified Body for PPE Regulation, is monitoring that the manufacturer is producing PPE in conformity with the type described in the EU type-examination certificate and associated technical file and which satisfies the Essential Health and Safety Requirements of the Regulation. The equipment covered by this certificate is listed in the accompanying schedule. This certificate is not complete and has no validity without the accompanying schedule and revision index. The manufacturer is hereby authorized to affix our Notified Body number, 2834, to each item of PPE mentioned in the schedule which accompanies this certificate whilst this certificate remains valid. This certificate and the accompanying schedule remain the property of CCQS and maybe withdrawn or revised at any time if CCQS considers that the equipment is no longer in conformity with the requirements of the Regulation.



Approved by Ireland  
Government  
as a Notified Body  
for CE Marking No.2834



Approved by:

  
Owen Bial, Director

### CCQS Certification Services Limited

Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland

Tel: +00 353 1 588 6920 Website: [www.ccqs.co.uk](http://www.ccqs.co.uk) E-mail: [verify@ccqs.ie](mailto:verify@ccqs.ie)  
If in any doubt about the integrity of this certificate, please contact CCQS by email to verify.

Page 1 of 2  
(Fm 220-015, Rev.2)



## Schedule of Module C2 production monitoring for equipment within the scope of Personal Protective Equipment Regulation (EU) 2016/425 Category III

Schedule to CCQS FPC Certificate No.: CE-PC-200114-004-FPC-E

Product reference and description		Reference standard
Particle filtering half mask	Model: ST-A9502	EN 149:2001+A1:2009
Particle filtering half mask	Model: A9507	EN 149:2001+A1:2009
Particle filtering half mask	Model: A9507+	EN 149:2001+A1:2009
Particle filtering half mask	Model: 9522E	EN 149:2001+A1:2009

Certificate Revision	Revision date	Revision details
B	2020-04-10	Initial issue
C	2020-06-16	Additional model A9507
D	2020-11-02	Additional model A9507+
E	2021-03-10	Additional model 9522E

This schedule has no validity without the accompanying certificate.

This schedule and the accompanying certificate remain the property of CCQS and maybe withdrawn or revised at any time if CCQS considers that the equipment is no longer in conformity with the requirements of the Regulation.



### CCQS Certification Services Limited

Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland

 Tel: +00 353 1 588 6920 Website: [www.ccqs.co.uk](http://www.ccqs.co.uk) E-mail: [verify@ccqs.ie](mailto:verify@ccqs.ie)

If in any doubt about the integrity of this certificate, please contact CCQS by email to verify.

 Page 2 of 2  
(Fm 220-015, Rev.2)





## Module B EU Type-Examination Certificate

For the requirements of PPE Regulation 2016/425

Certificate No.: CE-PC-210115-026-01-9A

<b>Certificate holder:</b>	<b>Jingzhou Strong Sciences &amp; Technology Development Co., Ltd.</b> No.32, East Jiangjin Road, High-tech Development Zone, Jingzhou City, Hubei Province, China
<b>Product:</b>	<b>Particle Filtering Half Mask</b> Detailed product description listed in the Annex
<b>Model(s):</b>	9522E
<b>Standard(s):</b>	EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking
<b>Issue date:</b>	2021-03-10
<b>Revision date:</b>	2021-03-10
<b>Expiry date:</b>	2026-03-09

The product(s) on this certificate and the Technical File have been assessed and found to be in conformance with the applicable Essential Health and Safety Requirements in Annex II of the PPE regulation 2016/425.

Any changes to the design, manufacturing location or manufacture of the PPE product certified here must be advised to CCQS Certification Services Limited for review.

CE marking shall not be applied until the requirements of all the PPE Regulation 2016/425 and relevant EN Harmonised standards and/or Technical specifications have been met.

If the certified product is Category III then this certificate is only valid if used in conjunction with Conformity Assessment against Module C2 or Module D.

This certificate remains the property of CCQS and maybe withdrawn at any time if it is considered that the equipment is no longer in conformity with the requirements of the PPE Regulation 2016/425.



Approved by Ireland  
Government  
as a Notified Body  
for CE Marking No.2834



Approved by:



Owen Bian - Director

### CCQS Certification Services Limited

Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15,  
D15 AKK1, Ireland

Tel: +00 353 1 588 6920 Website: [www.ccqs.co.uk](http://www.ccqs.co.uk) E-mail: [verify@ccqs.ie](mailto:verify@ccqs.ie)

If in any doubt about the integrity of this certificate, please contact CCQS by email to verify.

Page 1 of 2  
(Fm 220-017, Rev.2)



## Module B EU Type-Examination Certificate Annex

For the requirements of PPE Regulation 2016/425

Certificate No.: CE-PC-210115-026-01-9A

**Applicable standards and specification:**

EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking

Model reference	Product description
9522E	Folding filtering half mask fitted with ear loops and head harness retaining clip, internal metal nose clip Mask body color: White Classification: FFP2 NR Test Report No.: 2020(F) - 0640

Certificate Revision	Revision date	Revision details
A	2020-03-10	Initial issue

**CCQS Certification Services Limited**

Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland

Tel: +00 353 1 588 6920 Website: [www.ccqs.co.uk](http://www.ccqs.co.uk) E-mail: [verify@ccqs.ie](mailto:verify@ccqs.ie)

If in any doubt about the integrity of this certificate, please contact CCQS by email to verify.

Page 2 of 2  
(Fm 220-017, Rev.2)



中国认可  
国际互认  
检测  
TESTING  
CNAS L1499National Quality Supervision and Testing Center for  
Personal Protective Equipment (Beijing)  
(Testing Laboratory for Labour Protection Products of  
Beijing Municipal Institute for Labour Protection)No.55 Taoranting Street, Xicheng District, Beijing, China.  
Phone: +86 10 63519250 +86 10 63520770 +86 10 83530311  
Fax: +86 10 63519250 +86 10 63520770

The Testing Center is accredited for compliance with ISO/IEC 17025.

The results of tests, calibrations and/or measurements included in this document are traceable to Chinese/national standards.


CNAS is a signatory to the ILAC mutual recognition arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**TEST REPORT****Particulate respirator-half facepiece****EN 149: 2001 +A1: 2009 Respiratory protective devices — Filtering half masks to protect against particles — Requirements, testing, marking**

**Product:** Particle filtering half mask  
**Report No:** 2020 (F) - 0640  
**Client:** Jingzhou Strong Sciences & Technology Development Co., Ltd.  
**Model (s):** 9522E  
**Date(s) of tests:** 2020.12.07-2021.01.08

**DESCRIPTION OF SAMPLES**

General Information	Classification	Main Components
<b>Manufacturer</b>	FFP2 NR	White folding mask
<b>Manufacturer Address</b>	Jingzhou Strong Sciences & Technology Development Co., Ltd. No. 32, East Jiangjin road, High-tech development zone, Jingzhou city, Hubei province, China	

**Signed:****Issued: 2021.01.11**陈倬为 Chen Zhuowei  
Authorized Signatory, Lab Director

Page 1 of 10

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

国家劳动防护用品质量监督检验中心(北京)



Report No: 2020 (F) - 0640

Page 2 of 10

**Conditions:**

The test results presented in this report relate to the samples tested only.

This report may be reproduced and distributed to your clients, provided that it is reproduced and distributed in full.

The authenticity of this test report and its contents can be verified by contacting the laboratory.

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

国家劳动防护用品质量监督检验中心(北京)





Report No: 2020 (F) - 0640

Page 4 of 10

FFP2	≤6%	≤6%
FFP3	≤1%	≤1%

**Note8: FFP2 respirator. Test results are shown in Annex A Table 7.9.2.**
**7.10 Compatibility with skin**
**Pass<sup>9</sup>**

Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.

**Note9: No irritation or any other adverse effect to health.**
**7.11 Flammability**
**Pass<sup>10</sup>**

When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.

**Note10: Test results are shown in Annex A Table 7.11.**
**7.12 Carbon dioxide content of the inhalation air**
**Pass<sup>11</sup>**

The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)

**Note11: Test results are shown in Annex A Table 7.12.**
**7.13 Head harness**
**Pass<sup>12</sup>**

The head harness shall be designed so that the particle filtering half mask can be donned and removed easily. The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.

**Note12: Head harness can be donned and removed easily, adjustable or self-adjusting and have sufficiently robust to hold the particle filtering half mask firmly.**
**7.14 Field of vision**
**Pass<sup>13</sup>**

The field of vision is acceptable if determined so in practical performance tests.

**Note13: Pass the practical performance tests.**
**7.15 Exhalation valve**
**N/A<sup>14</sup>**

A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.

If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.

Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.

When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10 s.

**Note14: No exhalation valve.**
**7.16 Breathing resistance**
**Pass<sup>15</sup>**

Classification	Maximum permitted resistance (mbar)		
	Inhalation		Exhalation
	30 l/min	95 l/min	160 l/min
FFP1	0.6	2.1	3.0
FFP2	0.7	2.4	3.0
FFP3	1.0	3.0	3.0

**Note15: FFP2 respirator. Test results are shown in Annex A Table 7.16.**

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

國家勞動保護用品質量監督檢驗中心(北京)

Report No: 2020 (F) - 0640

Page 5 of 10

**7.17 Clogging**N/A<sup>16</sup>**7.17.2 Breathing resistance**

Valved particle filtering half masks:

After clogging the inhalation resistances shall not exceed:

FFP1: 4 mbar, FFP2: 5 mbar, FFP3: 7 mbar at 95L/min continuous flow

The exhalation resistance shall not exceed 3 mbar at 160 L/min continuous flow

Valveless particle filtering half masks

After clogging the inhalation and exhalation resistances shall not exceed:

FFP1: 3 mbar, FFP2: 4 mbar, FFP3: 5 mbar at 95L/min continuous flow

**7.17.3 Penetration of filter material**

Sodium chloride test 95 l/min

FFP1 ≤20%

FFP2 ≤6%

FFP3 ≤1%

Paraffin oil test 95 l/min

≤20%

≤6%

≤1%

**Note16: Single shift use only.****7.18 Demountable parts**Pass<sup>17</sup>

All demountable parts (if fitted) shall be readily connected and secured, where possible by hand

**Note17: In accordance with the requirement.****9 Marking**

Not tested

**9.1 Packaging**

The following information shall be clearly and durably marked on the smallest commercially available packaging or legible through it if the packaging is transparent.

**9.1.1** The name, trademark or other means of identification of the manufacturer or supplier.**9.1.2** Type-identifying marking.**9.1.3** Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable.

Example: FFP2 R D.

**9.1.4** The number and year of publication of this European Standard.**9.1.5** At least the year of end of shelf life. The end of shelf life may be informed by a pictogram as shown in Figure 12a, where yyyy/mm indicates the year and month.**9.1.6** The sentence 'see information supplied by the manufacturer', at least in the official language(s) of the country of destination, or by using the pictogram as shown in Figure 12b.**9.1.7** The manufacturer's recommended conditions of storage (at least the temperature and humidity) or equivalent pictogram, as shown in Figures 12c and 12d.**9.1.8** The packaging of those particle filtering half masks passing the dolomite clogging test shall be additionally marked with the letter "D". This letter shall follow the classification marking preceded by a single space.**9.2 Particle filtering half mask**

Particle filtering half masks complying with this European Standard shall be clearly and durably marked with the following:

**9.2.1** The name, trademark or other means of identification of the manufacturer or supplier.**9.2.2** Type-identifying marking.

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

国家劳动防护用品质量监督检验中心(北京)

Report No: 2020 (F) - 0640

Page 6 of 10

**9.2.3** The number and year of publication of this European Standard.**9.2.4** Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D.

**9.2.5** If appropriate the letter D (dolomite) in accordance with clogging performance. This letter shall follow the classification marking preceded by a single space

**9.2.6** Sub-assemblies and components with considerable bearing on safety shall be marked so that they can be identified.

---

**End of Test Results**

---

---

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

---

國家勞動保護用品質量監督檢驗中心(北京)



**Annex A: Summarization of Test Data**
**Table 7.9.1-A Inward leakage test data**

Test specification: EN 149: 2001+A1: 2009 Clause 8.5

Subject	Sample No.	Condition	Walk(%)	Head Side/side(%)	Head up/down(%)	Talk(%)	Walk(%)	Mean(%)
Yi	1	A.R.	5.19	5.31	5.67	5.25	5.05	5.3
Gong	2	A.R.	5.94	6.23	6.46	6.29	6.13	6.2
Yu	3	A.R.	6.11	6.25	6.42	6.31	6.16	6.3
Hu	4	A.R.	6.47	6.64	6.84	6.72	6.60	6.7
Xu	5	A.R.	7.09	7.42	7.64	7.35	7.21	7.3
Deng	6	T.C.	5.83	6.05	6.26	6.04	5.89	6.0
Zhang	7	T.C.	4.74	4.88	5.00	4.82	4.68	4.8
Zhi	8	T.C.	6.92	7.16	7.36	7.10	6.94	7.1
Fang	9	T.C.	6.35	6.55	6.70	6.53	6.41	6.5
Lv	10	T.C.	6.81	7.29	7.47	7.26	6.89	7.1
All 50 individual exercise results were not greater than 11 % All 10 individual wearer arithmetic means were not greater than 8 %								Pass

**Table 7.9.1-B Facial dimension**

Subject	Face length	Face Width	Face Depth	Mouth Width
Yi	120	130	109	59
Gong	122	140	115	65
Yu	119	160	139	55
Hu	112	122	119	63
Xu	110	130	118	60
Deng	115	119	110	59
Zhang	112	123	113	55
Liu	103	130	100	50
Zhi	118	139	130	63
Fang	115	129	120	50
Chen	116	150	132	56
Lv	110	121	110	53

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

国家劳动防护用品质量监督检验中心(北京)

**Table -7.9.2 Penetration of filter material**

Test specification: EN 149: 2001+A1: 2009 Clause 8.11

Aerosol	Condition	Sample No.	Penetration (%)	Assessment
Sodium chloride test	As received	11	0.329	Pass
		12	0.276	
		13	0.255	
	Simulated wearing treatment	14	0.318	
		15	0.364	
		16	0.427	
	Mechanical strength+ Temperature conditioned	17	0.393	
		18	0.439	
		19	0.476	
Paraffin oil test	As received	20	1.28	Pass
		21	1.53	
		22	1.37	
	Simulated wearing treatment	23	1.44	
		24	1.65	
		25	1.71	
	Mechanical strength+ Temperature conditioned	26	1.96	
		27	1.82	
		28	1.79	
Flow conditioning: Single filter: 95.0 L/min				

**Table 7.11 Flammability**

Test specification: EN 149: 2001+A1: 2009 Clause 8.6

Condition	Sample No.	Result	Assessment
As received	29	Burn for 1 s	Pass
	30	Burn for 1 s	
Temperature conditioned	31	Burn for 1 s	
	32	Burn for 2 s	

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

国家劳动保护用品质量监督检验中心(北京)

**Table 7.12 Carbon dioxide content of the inhalation air**

Test specification: EN 149: 2001+A1: 2009 Clause 8.7

Condition	Sample No.	Result	Assessment
As received	33	0.49%	Mean value 0.5%
	34	0.53%	
	35	0.52%	
			Pass

**Table 7.16 Breathing resistance (mbar)**

Test specification: EN 149: 2001+A1: 2009 Clause 8.9

As received	Flow rate	36					37					38				
		A	B	C	D	E	A	B	C	D	E	A	B	C	D	E
Inhalation	30 l/min	0.6	0.7	0.7	0.6	0.7	0.7	0.7	0.6	0.7	0.7	0.7	0.7	0.6	0.7	0.7
	95 l/min	1.8	1.8	1.8	1.7	1.7	1.7	1.8	1.9	1.8	1.7	1.8	1.9	1.9	1.9	1.9
Exhalation	160 l/min	2.5	2.5	2.6	2.6	2.6	2.5	2.6	2.6	2.6	2.5	2.5	2.6	2.6	2.6	2.7
Simulated wearing treatment	Flow rate	39					40					41				
		A	B	C	D	E	A	B	C	D	E	A	B	C	D	E
Inhalation	30 l/min	0.6	0.6	0.7	0.6	0.6	0.7	0.7	0.7	0.6	0.6	0.7	0.6	0.6	0.6	0.6
	95 l/min	1.8	1.8	1.8	1.9	1.8	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.7	1.8	1.7
Exhalation	160 l/min	2.6	2.5	2.6	2.5	2.6	2.6	2.5	2.5	2.7	2.5	2.6	2.5	2.7	2.6	2.6
Temperature conditioned	Flow rate	42					43					44				
		A	B	C	D	E	A	B	C	D	E	A	B	C	D	E
Inhalation	30 l/min	0.7	0.6	0.6	0.7	0.7	0.8	0.8	0.7	0.8	0.7	0.6	0.6	0.7	0.7	0.6
	95 l/min	1.8	1.7	1.8	1.9	1.8	1.8	1.9	1.8	1.8	1.8	1.7	1.8	1.7	1.9	1.8
Exhalation	160 l/min	2.7	2.5	2.6	2.6	2.6	2.7	2.6	2.5	2.7	2.6	2.5	2.6	2.7	2.6	2.7
Assessment		Pass														

A: facing directly ahead; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side

Test	Uncertainty
Total inward leakage	4.1%
Penetration of filter material	1.1%
Flammability	5.0%
Carbon dioxide content of the inhalation air	2.6%
Breathing resistance	1.8%

**End of Annex A**

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.


國家勞動保護用品質量監督檢驗中心(北京)



Report No: 2020 (F) - 0640

Page 10 of 10

**ANNEX B PHOTOS OF SAMPLES**

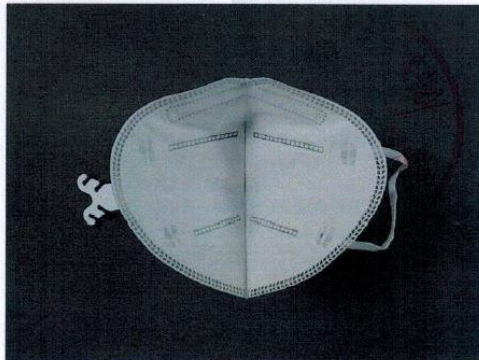

**End of Annex B**

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

國家勞動保護用品質量監督檢驗中心(北京)



荆州思创科技开发有限公司  
JINGZHOU STRONG SAFETY & TECHNOLOGY CO., LTD  
0716-4300018 全国服务电话  
<http://www.jzstrong.com>



## JINGZHOU STRONG SCIENCES&TECHNOLOGY DEVELOPMENT CO.,LTD DECLARATION

All the products produced by Jingzhou Strong Sciences & Technology Development CO.,LTD **do not contain Latex.**

Now make the following descriptions of the raw materials of our company's products :

The main parts of the disposable face masks are made of polypropylene, The contact parts of the semi-facial and full-face masks with the face are made of silicone or TPE which is a thermoplastic elastomer material. All the above materials are latex free.

The detail product model is below:

1. FFP2 Disposable Face Mask: 9522E, A9507, ST-A9502 are made of Polypropylene, Polyester, Spandex.
2. ( Rubber ) Semi-facial and Full-face Mask: AX,100C, FCX, 1020B , 1030B, 1030C, 1060 , 1060T , FDX, FDLX, 1080T, 1080X, FCB , FDB , M60X-1A, M60X-3A , M60X-1B, M60X-3B, S100X-1, S100X-2 , S100X-3 ; These series products are made of Thermoplastic elastomer material TPE, Polypropylene ,Nylon, Polycarbonate, etc.
3. ( Silicone ) Semi-facial and Full-face Mask: AG, AG100, FCG ,1020A, 1030A, FDG ,FDL, 1080, 1090, M40, M50, M60G-1A, M60G-3A, M60G-1B, M60G-3B, M70, M80, S100-1, S100-2, S100-3; These series products are made of Silicone, Polypropylene, Nylon, Polycarbonate, etc.

We promise that the above statement is true and effective.

Company : Jingzhou Strong Sciences & Technology Development CO.,LTD

Signature: Abbie Chen

Date: 20<sup>th</sup>, Aug. 2021

Company Stamp: 